

FARA AND DURANNO




These high traction grenade nozzles have been designed and manufactured with a lot of rear jets that enable adequate **cleaning in pipes up to DN 800**.

An internal deviator maximizes flow efficiency reducing pressure drops inside the nozzle.

Suitable for **sand removal and long runs jobs**.

Ceramic inserts are standard configuration.

	Fara 1" F	Duranno 1" F
Ø x L (in)	3.5" x 5.6"	4.2" x 7.3"
Weight (lbs)	8 lbs.	20.1 lbs.
Jet angle	15°	20°/30°
Rear jets	10 x M10 x 1	16 x M10 x 1
Front jet	M10x1	n/a
Pressure (psi)	2,000 - 3,000 psi	2,000 - 3,000 psi
Flow rate (gpm)	50 - 80 gpm	50 - 80 gpm
Working DN (in)	6" - 20"	11.8" - 31.5"
Nozzles w/ceramic inserts	65540.600	65540.810

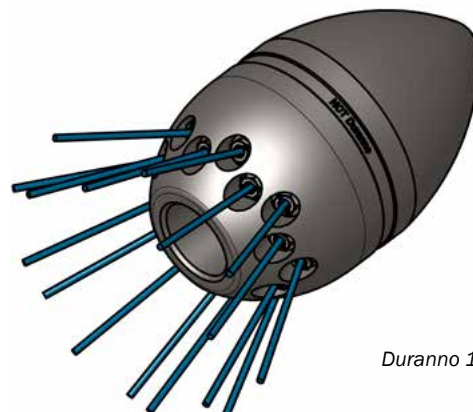

Duranno 1"